


ROMAN-P1 pendant luminaires

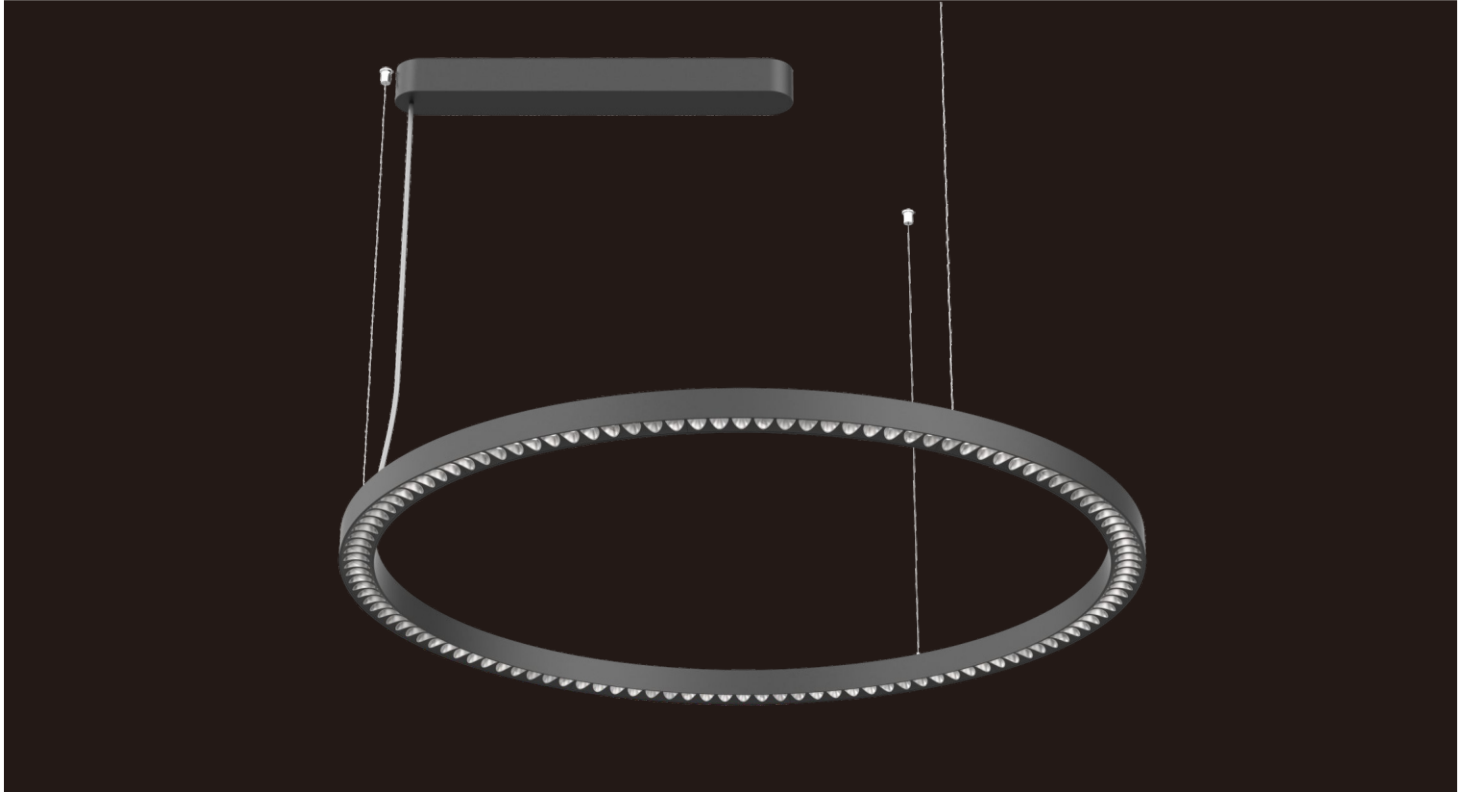

With extremely simple design and excellent craftwork, exquisite appearance looks with rich of texture. We offer 655MM, 905MM, 1205MM for choosing. Lamp is designed with special Direct/Indirect lighting and 115°(Indirect) beam angle. Collocated with micro reflector and anti-glare cover, it can realize 60°(Direct) beam angle and perfect light cutoff. UGR<6. Typical value of light efficiency is 150lm/w, and lighting is of flicker free. Support smart functions like Motion sensor, 1-10V and Dali dimming. Work with CASAMBI wireless system to support group setting. Simply assembling structure, flexible to support customers' requirement. Profile aluminum and PC as main materials. Suspension installation.

Features

Ultimate uniform and quality lighting effects with professional glare control, UGR <6

Light efficiency up to 150lm/W

Come with several size $\phi 655$, $\phi 905$, $\phi 1205$

extremely slim design (only 40 x 38 mm)

$L_{max} \geq 65^\circ < 1000 \text{ cd/m}^2$


Support for smart control functions

- DALI dimming
- 1-10V dimming
- CASAMBI(Customizable)




5 years warranty

Application Areas

Open-plan office, individual office, meeting room, guest room, etc.



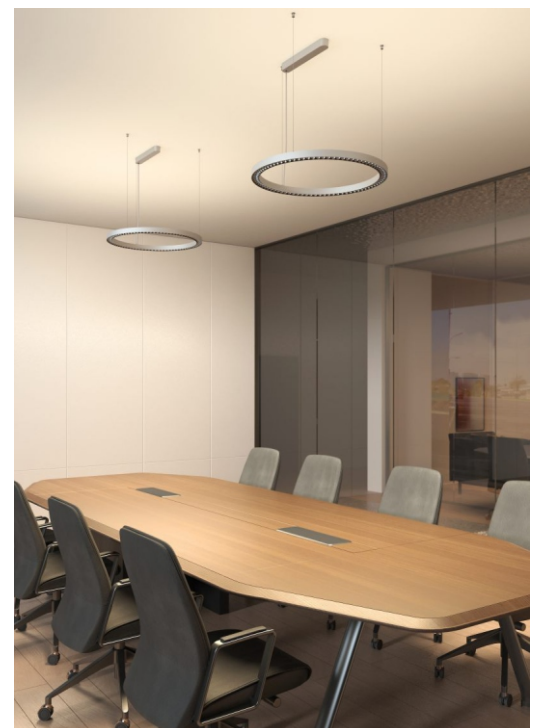


Technical data

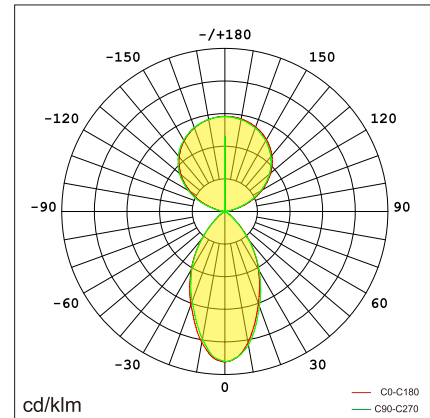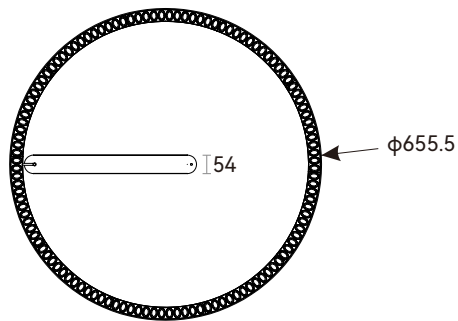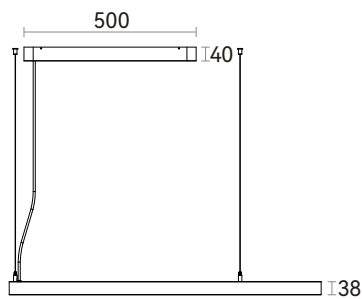




Item No.	BROP1-6506024-NN	BROP1-6506024-VN	BROP1-6506024-DN
Input Power(±10%)	↑ 36W/24W ↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux(±10%)	↑ 5900lm/3100lm ↓		
UGR	<6		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑ 115°/60° ↓		
CCT(±200K)	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Black / White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	3.4 kg		
Gross Weight	5.9 kg		
Package size	720*710*112mm (1pcs)		
20GP	504pcs		
40GP	1008pcs		

Technical data

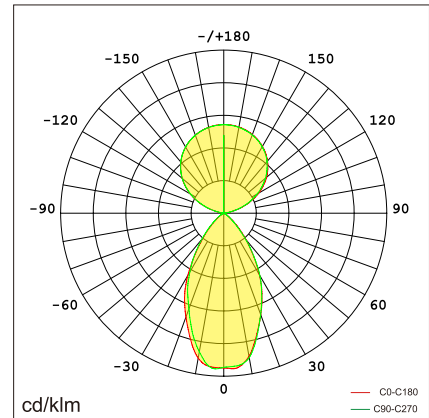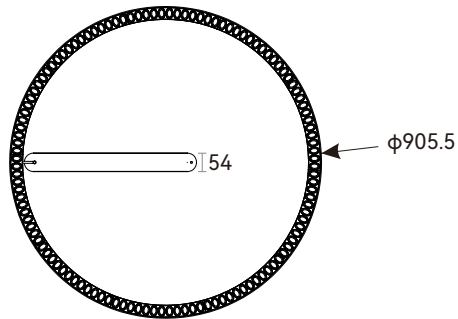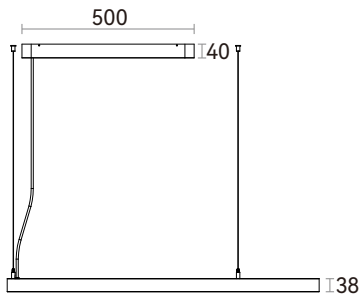




Item No.	BROP1-9008032-NN	BROP1-9008032-VN	BROP1-9008032-DN
Input Power($\pm 10\%$)	$\uparrow 48W/32W \downarrow$		
Input Voltage	AC200~240V		
Power Factor	≥ 0.9		
Luminous Flux($\pm 10\%$)	$\uparrow 7800lm/4200lm \downarrow$		
UGR	< 6		
Color Rendering Index	> 80		
Life Time	L80(B10)50,000H		
Beam Angle	$\uparrow 115^\circ/60^\circ \downarrow$		
CCT($\pm 200K$)	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Black / White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	$-40^\circ C \sim +80^\circ C$		
Working Temperature	$-20^\circ C \sim +45^\circ C$		
Net Weight	4.3 kg		
Gross Weight	9.1 kg		
Package size	995*990*112mm (1pcs)		
20GP	276pcs		
40GP	576pcs		

Technical data

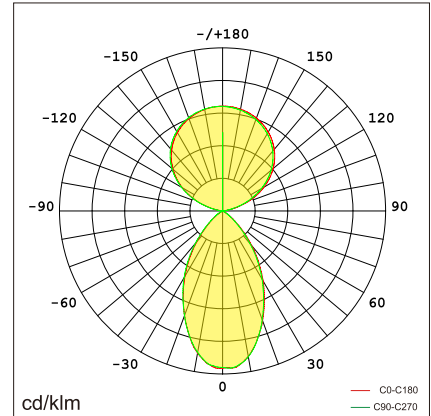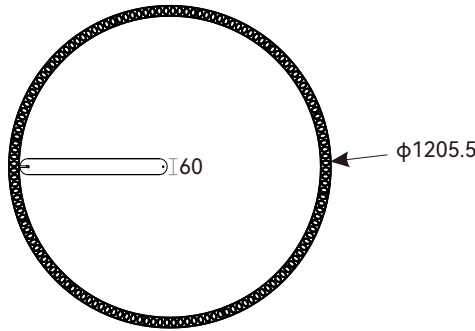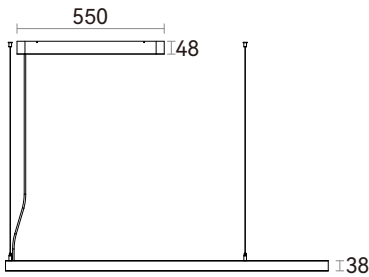

Item No.	BROP1-1212048-NN	BROP1-1212048-VN	BROP1-1212048-DN
Input Power(±10%)	↑ 72W/48W ↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux(±10%)	↑ 12000lm/6000lm ↓		
UGR	<6		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑ 115°/60° ↓		
CCT(±200K)	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Black / White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	5.7 kg		
Gross Weight	14 kg		
Package size	1287*1287*110mm (1pcs)		
20GP	126pcs		
40GP	274pcs		

Packaging

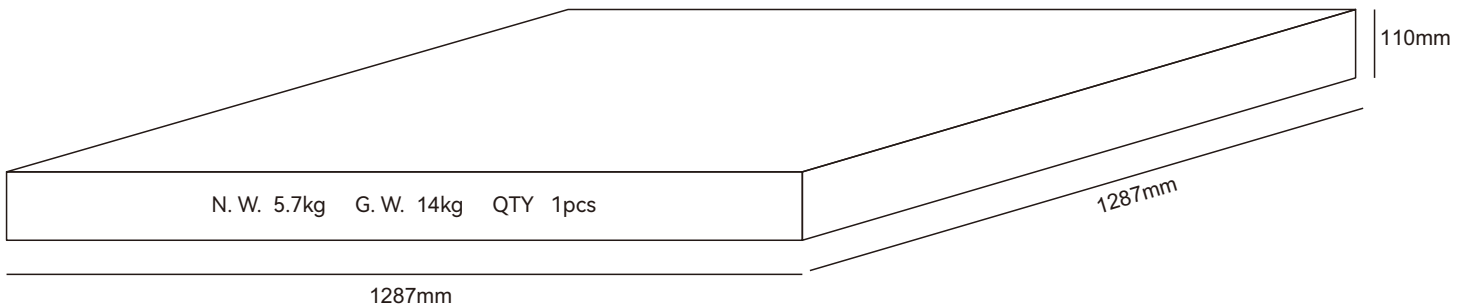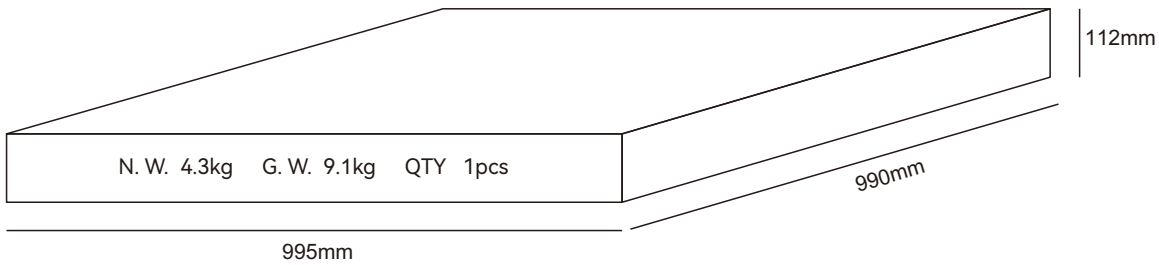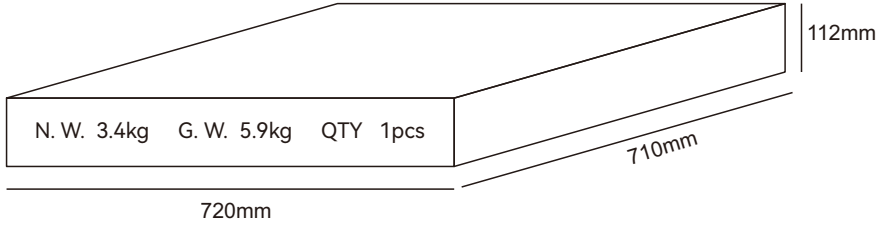

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report. Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.