


# COFFEE-R free standing luminaire

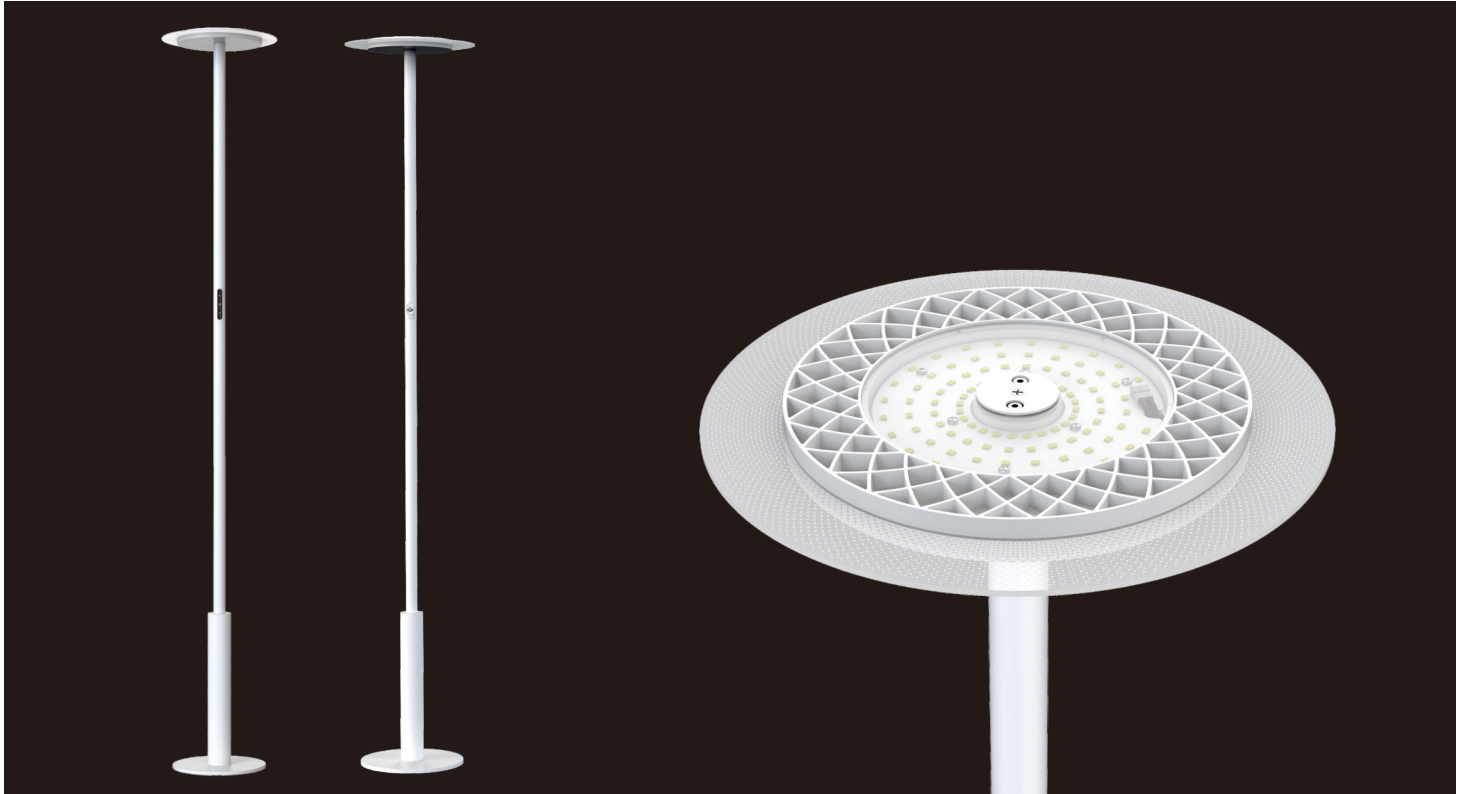

Minimalist design, rich texture, perfect assembly details, and exquisite finishes give COFFEE a unique and attractive look. 95% indirect lighting ensure you to enjoy a soft, healthy and wonderful lighting experience.

Unlike similar products, the luminous flux is up to 5500 lumens, which is good for large area supplementary and small-space main lighting applications.

The lamp head adopts aluminum alloy die-casting as heat sink, which can meet the maximum heat distribution power of 45W, and acrylic light guide plate dotted with laser dot emits uniform decorative light. The pole is made of 6063 aluminum, double pole design with built-in power supply in the lower pole. The base made of hot-rolled steel plate provides more concise and refined appearance.

COFFEE supports Push dimming for brightness adjustment with wide application in negotiation rooms, small meeting rooms, BREAKOUT areas and other office areas. It is also a good choice for lighting such as family living room, bedrooms and study rooms lighting.

## Features

---

Compact and quality appearance, patent design with rich texture and visual impact

---

High lumen efficiency reach to 125LM/W, total 5500lm lumen output

---

95% indirect light, with perfect UGR control, UGR <10

---

Push dimming or Touchpaneldimming(optional)

---

5 years warranty

---

## Application Areas



---

For negotiation rooms, small meeting rooms, BREAKOUT areas and other office areas.  
Family living room, bedrooms and study rooms lighting.

---



## Technical data

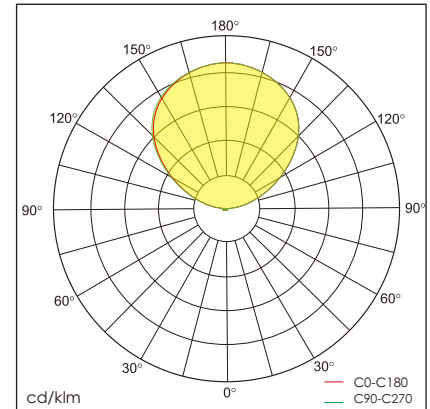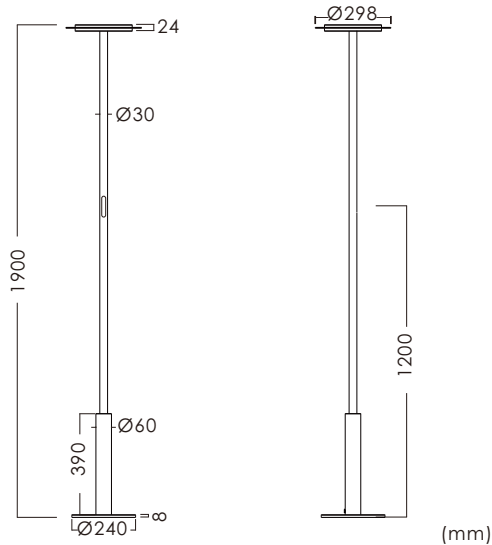

Item No.	BCRF-19045000-BN
Input Power	45W
Input Voltage	AC200~240V
Power Factor	≥0.9
Luminous Flux(±5%)	5500lm
UGR	<10
Color Rendering Index	>80
Life Time	L80(B10)50,000H
Beam Angle	110°
CCT	3000/4000/6000K
Colour consistency SDCM	< 3
Dimming	No dimming or Push dimming or Touchpaneldimming(optional)
Sensor	NO
Housing Color	White/Black
Fixture Materia	6063AL
Protection Level	IP20
Storage Temperature	-40°C~+80°C
Working Temperature	-20°C~+45°C
Net Weight	5.8kg
Package size	355*355*102mm(Head)/1945*105*125mm(Pole)
20GP	629pcs
40GP	1390pcs

Shenzhen Nexol Lighting Co., Ltd

E-mail: [info@nexol-lighting.com](mailto:info@nexol-lighting.com)

[www.nexol-lighting.com](http://www.nexol-lighting.com)

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.