


ELFOO-C surface mounted luminaire

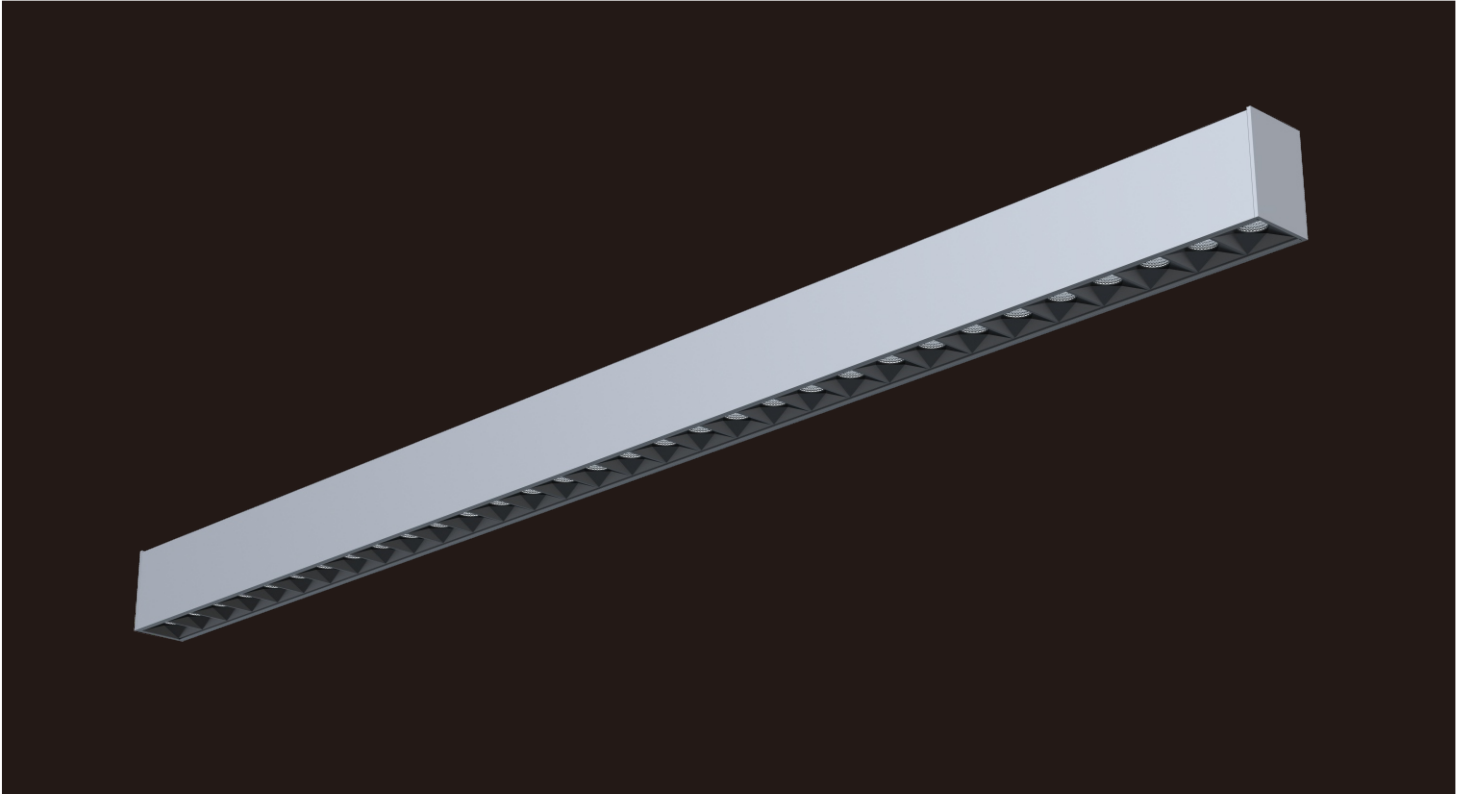

With extremely simple design and excellent craftwork, exquisite appearance looks with rich of texture. Collocated with micro reflector and anti-glare cover, it can realize 80° beam angle and perfect light cutoff. UGR < 18. Adopting trimless design, independent linear led modules and push-in & push-out structure, lamp is easy for installation and maintenance. Main material includes aluminum profile and PC. Typical value of light efficiency is 110lm/w, and lighting is of flicker free. Lamp supports 1-10V and DALI dimming.

Features

Wide beam angle with professional Glare control design,
UGR<18

Linkable for linear applications

No gap and no light come out from connection parts when
linked together

Support for smart control functions

- DALI and 1-10V dimming
 - Tunable white
 - CASAMBI
-



5 years warranty

Application Areas

For open-planed office, training room conference room
and classroom, etc.



Technical data

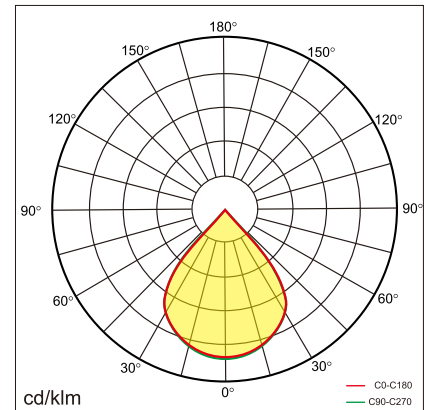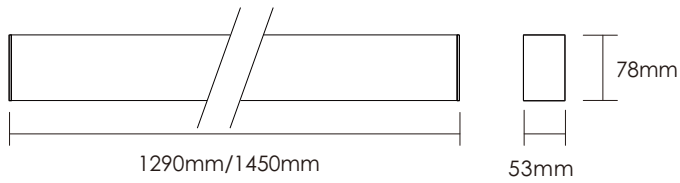

Item No.	BEFC-1203030-NN	BEFC-1203030-VN	BEFC-1203030-DN
Input Power	30W		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	3200lm		
UGR	<18		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	80°		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Material	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	3.8kg		
Package size	1430*255*195mm		
20GP	1292pcs		
40GP	2980pcs		

Technical data

Item No.	BEFC-1503535-NN	BEFC-1503535-VN	BEFC-1503535-DN
Input Power	35W		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	3600lm		
UGR	<18		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	80°		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP 20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	4.1kg		
Package size	1590*255*195mm		
20GP	1160pcs		
40GP	2680pcs		

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: 3&4th F, Building A3, Xin-Gui-Yuan Industrial Park, DaFu Road, GuanLan Town, ShenZhen, China 518110

Office: 5th F, Building A1, Zhang-Ge Techno Park, GuanLan Town, ShenZhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.