

# HOME0 free standing luminaire



Inheriting classic design, round corner structure, perfect assembly details makes exquisite appearance with rich texture. The product emits downwards and adopts a diffuser plate of a microprism structure to realize an anti-glare function, beam angle is about 90 degrees, the upward beam angle is 110 degrees. DIY assembly, no need professionals, portable on the side of the desktop, easy installation, flexible using. Typical value is 110LM/W, flicker free, KNOB dimming, 50% DIRECT / 50% INDIRECT synchronous dimming control, and other intelligent control like motion sensor and day light sensor, etc. The main materials are aluminum profiles, steel and PMMA. With Integrated structure pole.

## Features

---

Simple and exquisite industrial design with rich texture

---

UGR<17, lighting uniform and healthy

---

SDCM < 3

---

Support smart control functions

- Knob dimming
  - Motion sensor
  - Daylight sensor
- 

5 years warranty

---

## Application Areas



---

For personal offices, public offices and other office space.

---



## Technical data

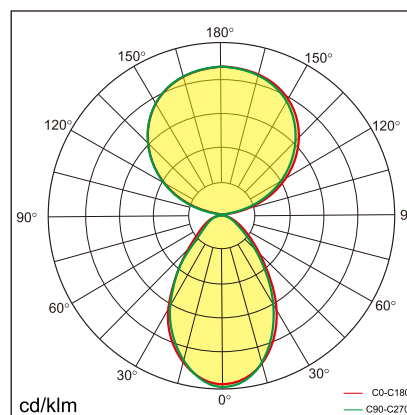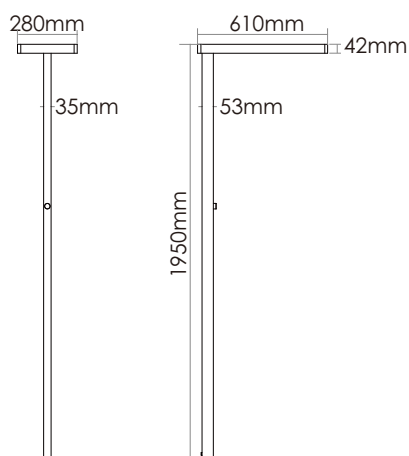

Item No.	BHOF-1906030-BN	BHOF-1906030-BM	BHOF-1906030-BD
Input Power	↑30W/30W↓	↑30W/30W↓	↑30W/30W↓
Input Voltage	AC200~240V	AC200~240V	AC200~240V
Power Factor	≥0.9	≥0.9	≥0.9
Luminous Flux	↑3500lm/3100lm↓	↑3500lm/3100lm↓	↑3500lm/3100lm↓
UGR	<17	<17	<17
Color Rendering Index	>80	>80	>80
Life Time	L80(B10)50,000H	L80(B10)50,000H	L80(B10)50,000H
Beam Angle	↑110°/90°↓	↑110°/90°↓	↑110°/90°↓
CCT	3000/4000/6000K	3000/4000/6000K	3000/4000/6000K
Colour consistency SDCM	< 3	< 3	< 3
Dimming	Knobdimming	Knobdimming	Knobdimming
Sensor	NO	Motion sensor	Daylight sensor Motion sensor
Housing Color	Silver/White	Silver/White	Silver/White
Fixture Materia	6063AL	6063AL	6063AL
Protection Level	IP20	IP20	IP20
Storage Temperature	-40°C~+80°C	-40°C~+80°C	-40°C~+80°C
Working Temperature	-20°C~+45°C	-20°C~+45°C	-20°C~+45°C
Net Weight	12.5kg	12.5kg	12.5kg
Package size	2050*230*210mm 720*390*160mm	2050*230*210mm 720*390*160mm	2050*230*210mm 720*390*160mm
20GP	328pcs	328pcs	328pcs
40GP	760pcs	760pcs	760pcs

## Technical data

Item No.	BHOF-1908040-BN	BHOF-1908040-BM	BHOF-1908040-BD
Input Power	↑40W/40W↓	↑40W/40W↓	↑40W/40W↓
Input Voltage	AC200~240V	AC200~240V	AC200~240V
Power Factor	≥0.9	≥0.9	≥0.9
Luminous Flux	↑4600lm/4200lm↓	↑4600lm/4200lm↓	↑4600lm/4200lm↓
UGR	<17	<17	<17
Color Rendering Index	>80	>80	>80
Life Time	L80(B10)50,000H	L80(B10)50,000H	L80(B10)50,000H
Beam Angle	↑110°/90°↓	↑110°/90°↓	↑110°/90°↓
CCT	3000/4000/6000K	3000/4000/6000K	3000/4000/6000K
Colour consistency SDCM	< 3	< 3	< 3
Dimming	Knobdimming	Knobdimming	Knobdimming
Sensor	NO	Motion sensor	Daylight sensor Motion sensor
Housing Color	Silver/White	Silver/White	Silver/White
Fixture Material	6063AL	6063AL	6063AL
Protection Level	IP 20	IP 20	IP 20
Storage Temperature	-40°C~+80°C	-40°C~+80°C	-40°C~+80°C
Working Temperature	-20°C~+45°C	-20°C~+45°C	-20°C~+45°C
Net Weight	12.5kg	12.5kg	12.5kg
Package size	2050*230*210mm 720*390*160mm	2050*230*210mm 720*390*160mm	2050*230*210mm 720*390*160mm
20GP	328pcs	328pcs	328pcs
40GP	760pcs	760pcs	760pcs

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: [info@nexol-lighting.com](mailto:info@nexol-lighting.com)

[www.nexol-lighting.com](http://www.nexol-lighting.com)

Factory: 3&4th F, Building A3, Xin-Gui-Yuan Industrial Park, DaFu Road, GuanLan Town, ShenZhen, China 518110

Office: 5th F, Building A1, Zhang-Ge Techno Park, GuanLan Town, ShenZhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report. Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.