


# LENO-C2 Surface mounted luminaires

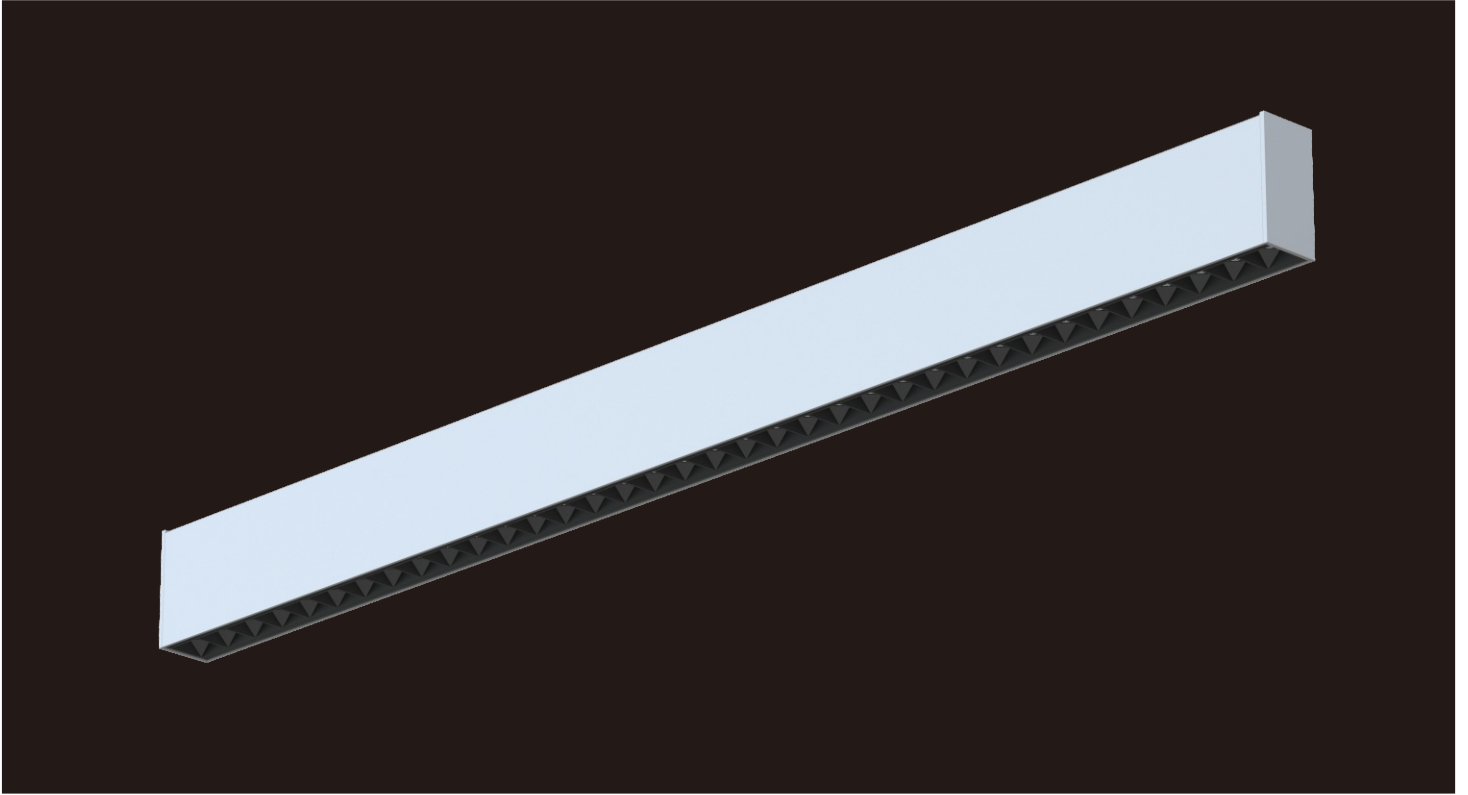

With extremely simple design and excellent craftwork, exquisite appearance looks with rich of texture. Collocated with micro reflector and anti-glare cover, it can realize 50° beam angle and perfect light cutoff. UGR value is as low as 10. Adopting trimless design, independent linear led modules and push-in & push-out structure, lamp is easy for installation and maintenance. Main material includes aluminum profile and PC. Typical value of light efficiency is 100lm/w, and lighting is of flicker free. Lamp supports 1-10V and DALI dimming. Adopting trimless and recessed installation.

## Features

---

PUSH-IN-PUSH-OUT Technology, offering an Impressive simple and nice installation experience

---

Linkable surface mounted profile system without connection gap

---

Easy for maintenance, offer solutions of L-LINK, T-LINK and X-LINK connection

---

Support DALI and 1-10V dimming

---

UGR<10

---

Support tunable white

---

5 years warranty

---

## Application Areas



---

For open-plan office, Individual office, small meeting room, reception, etc.

---



# Technical data

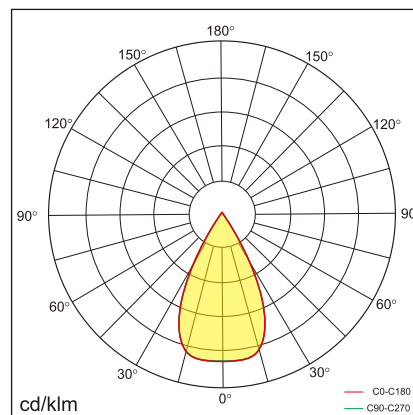

Item No.	BPRCN-0903030-NN	BPRCN-0903030-VN	BPRCN-0903030-DN
Input Power	30W		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	3000lm		
UGR	<10		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	50°		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	2.6kg		
Package size	1000*330*250mm		
20GP	2320pcs		
40GP	5136pcs		

# Technical data

Item No.	BPRCN-1204040-NN	BPRCN-1204040-VN	BPRCN-1204040-DN
Input Power	40W		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	4000lm		
UGR	<10		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	50°		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	3.15kg		
Package size	1215*330*250mm		
20GP	1912pcs		
40GP	4224pcs		

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: [info@nexol-lighting.com](mailto:info@nexol-lighting.com)

[www.nexol-lighting.com](http://www.nexol-lighting.com)

Factory: 3&4th F, Building A3, Xin-Gui-Yuan Industrial Park, DaFu Road, GuanLan Town, ShenZhen, China 518110

Of ce: 5th F, Building A1, Zhang-Ge Techno Park, GuanLan Town, ShenZhen, China 518110



All values in speci cation are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.