


KEY-R recessed luminaire

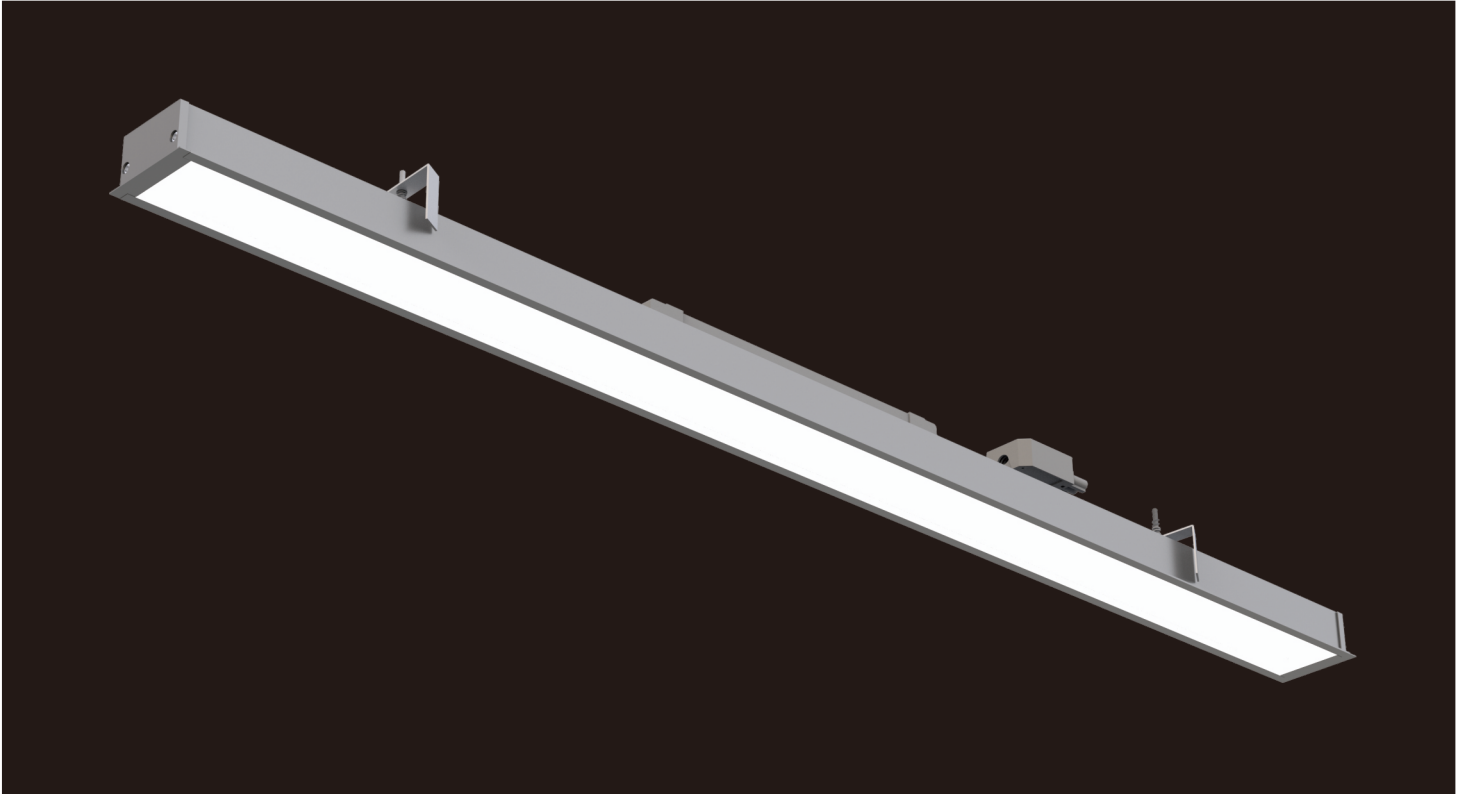

Simply and reasonable structure design with excellent craft work . Appearance with rich texture. flexible prism mask design, no light leakage from seams, Reliable heat dissipation system. 5 years warranty. Typical value up to 110lm/W with flicker freely. 1-10V and Dali synchronous dimming, support CASAMBI wireless system. Profile aluminum, Recessed installation, Easy & Fast.

Features

Simple and rich textured design

Flexible prisma plate

Light efficiency could be 120LM/W

Simple, easy and quick installation

Support for smart control functions

- DALI dimming
- 1-10V dimming
- tunable white
- CASAMBI



5 years warranty

Application Areas

For open-plan office, reception, training room,cafeteria,etc.



Technical data

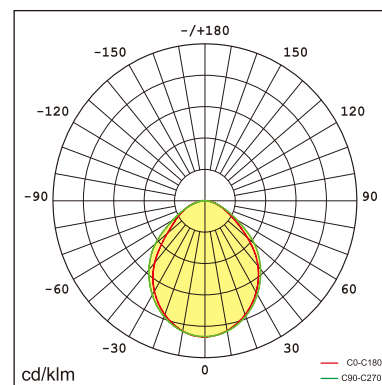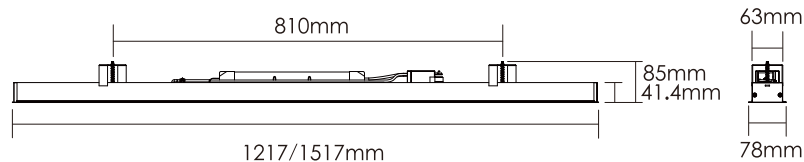

Item No.	BKEY-1204040-NN	BKEY-1204040-VN	BKEY-1204040-DN
Input Power	40W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	4400lm ↓		
UGR	>19		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	90°		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	1.61kg		
Package size	1295*550*280mm (10pcs)		
20GP	136 boxes / 1360 (PCS)		
40GP	288 boxes / 2880 (PCS)		

Technical data

Item No.	BKEY-1505050-NN	BKEY-1505050-VN	BKEY-1505050-DN
Input Power	50W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	6000lm ↓		
UGR	>19		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	90°		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Material	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	2.1kg		
Package size	1595*550*280mm (10pcs)		
20GP	1040 boxes / 1040 (PCS)		
40GP	232 boxes / 2320 (PCS)		

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.