


# Licon-W wall mounted luminaire

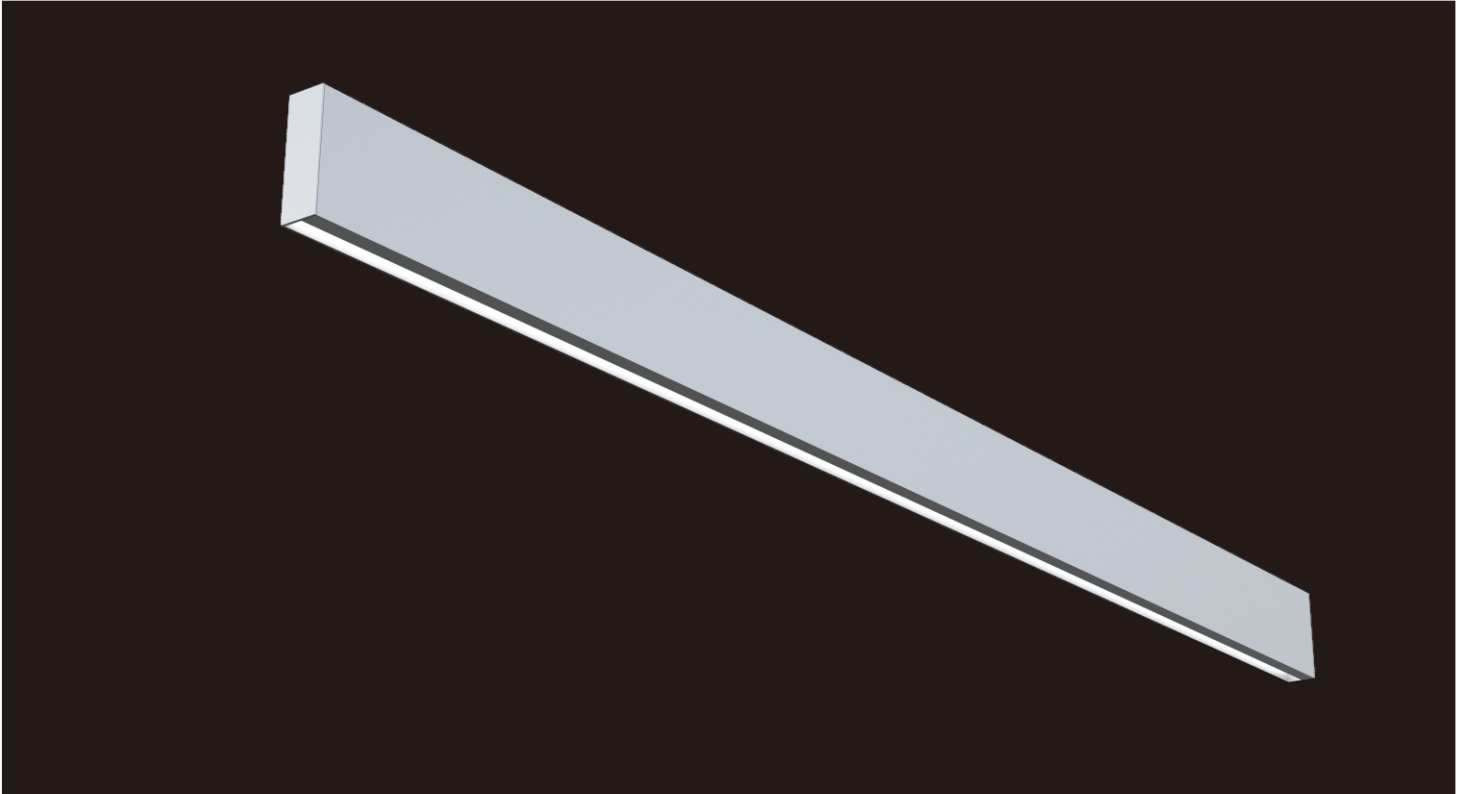

Licon-W is a linear wall lamp, supports for 1-10v dimming, DALI dimming, which can be widely used in almost all office space supplementary lighting applications, making the space light more comfortable and low glare.

## Features

---

Linkable wall lamp to avoid wiring problems,  
one input support 30 meters

---

Impressive easy for installation and maintenance

---

Support DALI and 1-10V Dimming

---

SDCM < 3

---

5 years warranty

---

## Application Areas




---

For open plan office, stairs, corridors and other office space.

---



## Technical data

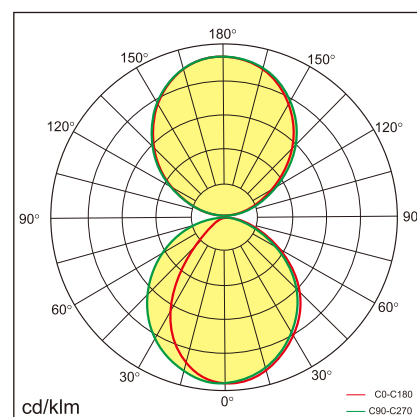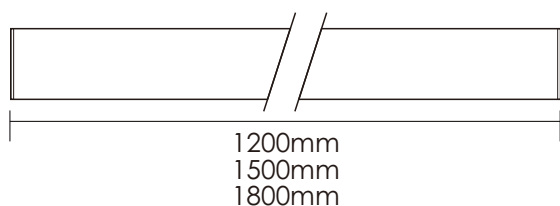

Item No.	BLIW-1204020-NN	BLIW-1204020-VN	BLIW-1204020-DN
Input Power	↑20W/20W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	↑1800lm/1800lm↓		
UGR	/		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	/		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White/Black		
Fixture Material	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	1.8kg		
Package size	1270*310*255mm		
20GP	1912PCS		
40GP	4216PCS		

## Technical data

Item No.	BLIW-1505025-NN	BLIW-1505025-VN	BLIW-1505025-DN
Input Power	↑25W/25W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	↑2250lm/2250lm↓		
UGR	/		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	/		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White/Black		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	2.2kg		
Package size	1570*310*255mm		
20GP	1544PCS		
40GP	3416PCS		

## Technical data

Item No.	BLIW-1806030-NN	BLIW-1806030-VN	BLIW-1806030-DN
Input Power	↑30W/30W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	↑2700lm/2700lm↓		
UGR	/		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	/		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White/Black		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	2.6kg		
Package size	1870*310*255mm		
20GP	1296PCS		
40GP	2864PCS		

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: [info@nexol-lighting.com](mailto:info@nexol-lighting.com)

[www.nexol-lighting.com](http://www.nexol-lighting.com)

Factory: 3&4th F, Building A3, Xin-Gui-Yuan Industrial Park, DaFu Road, GuanLan Town, ShenZhen, China 518110

Office: 5th F, Building A1, Zhang-Ge Techno Park, GuanLan Town, ShenZhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.