

Modern and simple design style, coupled with exquisite materials and perfect assembly details, the product appearance looks rich in texture. The direct light adopts a diffusion plate with microprism structure to realizeanti-glare function, and 90 degrees (direct), 110 degrees (indirect). Surface mounted installation, very simple and convenient. Typicallight efficiency 100LM/W, flicker free, 90% DIRECT / 10% INDIRECT lighting .It can realize 1-10V or DALI synchronous dimming ,and main materials are aluminum profiles and PMMA .Designed with Round corner.

Features

Direct and Indirect lighting with impressive light uniformity

UGR<19

Support DALI and 1-10V dimming

Easy for installation and maintenance


5 years warranty




For open-plan office, training room, cafeteria, Guest room





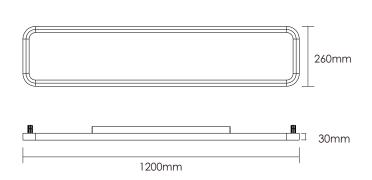



Item No.	BMRC-1206050-NN	BMRC-1206050-VN	BMRC-1206050-DN
Input Power	↑10W/50W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	↑1200lm/4200lm↓		
UGR	<19		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑110°/90°↓		
ССТ	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C∼+45°C		
Net Weight	6.15kg		
Package size	1250*390*300mm		
20GP	656pcs		
40GP	1448pcs		

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: 3&4th F, Building A3, Xin-Gui-Yuan Industrial Park, DaFu Road, GuanLan Town, ShenZhen, China 518110 Office: 5th F, Building A1, Zhang-Ge Techno Park, GuanLan Town, ShenZhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report. Information provided is subject to change without notice. Please verify all details with NEXOL Lighting. Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.