


OFA free standing luminaire

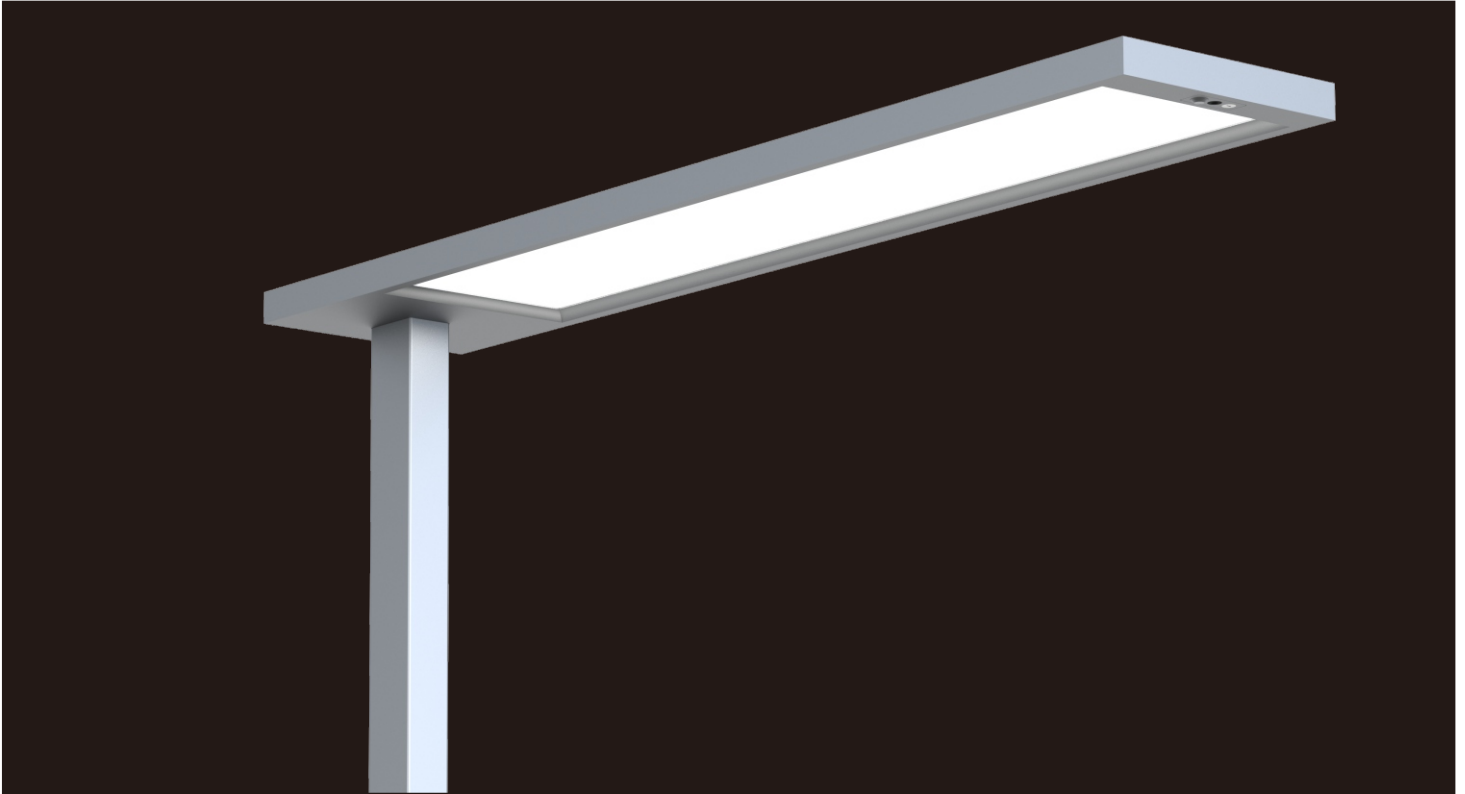

OFA, modern and simple design, with perfect craftsmanship and rich texture, which is suitable for a 15-20 m² individual office or an open office area without compensation light and could provide uniform, low glare and soft lighting for two standard desks. Direct light 25W, this lamp could achieve ultra-thin lamp body and uniform lighting effect according to side-lighting technology, Indirect light 75W, 140° beam angle, total luminous flux up to 12000LM and the UGR is less than 14. The product could realize direct and indirect light control individually, intelligent motion sensor, daylight sensor, tunable white and other stand-alone functions based on its own control system. It also supports to customize CASAMBI, HCL, and SWARM control system. The product could provide uniform, comfortable and low glare lighting for individual offices or open office areas without compensation light.

Features

Compact and quality appearance, patent design with rich texture and visual impact

High lumen efficiency reach to 120LM/W

85° beam angle direct light with perfect UGR control UGR less than 14

140° beam angle indirect light deliver a comfortable lighting for space

Direct and indirect light control Individually

Support for smart control functions

- touch panel dimming
- motion sensor
- day light sensor(optional)
- tunable white
- CASAMBI and SOCIL control system(optional)

Lighting distribution cover two desks



5 years warranty

Application Areas

For personal offices, public offices and other office space.



Technical data

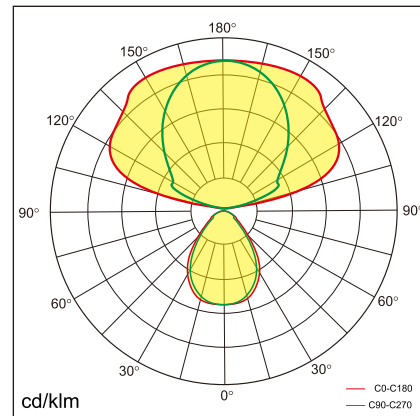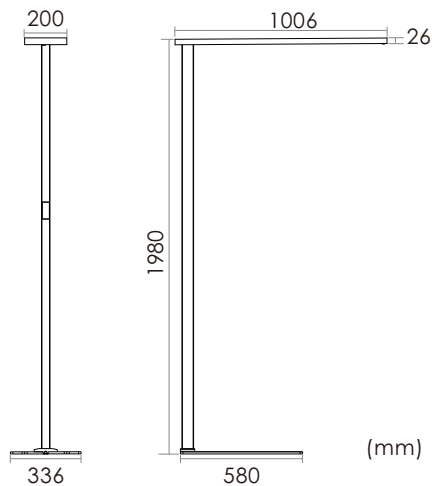

Item No.	BOFF-1910025-BD	BOFF-1910025-CD
Input Power	↑75W/25W↓	↑75W/25W↓
Input Voltage	AC200~240V	AC200~240V
Power Factor	≥0.9	≥0.9
Luminous Flux	↑9500lm/2500lm↓	↑8250lm/2250lm↓
UGR	<14	<14
Color Rendering Index	>80	>80
Life Time	L80(B10)50,000H	L80(B10)50,000H
Beam Angle	↑140°/85°↓	↑140°/85°↓
CCT	3000/4000/6000K	3000~6000K
Colour consistency SDCM	< 3	< 3
Dimming	Touch panel dimming	Touch panel dimming
Sensor	Daylight sensor Motion sensor	Daylight sensor Motion sensor
Housing Color	Silver/White	Silver/White
Fixture Materia	6063AL	6063AL
Protection Level	IP20	IP20
Storage Temperature	-40°C~+80°C	-40°C~+80°C
Working Temperature	-20°C~+45°C	-20°C~+45°C
Net Weight	16kg	16kg
Package size	2055*330*145mm	2055*330*145mm
20GP	245pcs	245pcs
40GP	540pcs	540pcs

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: 3&4th F, Building A3, Xin-Gui-Yuan Industrial Park, DaFu Road, GuanLan Town, ShenZhen, China 518110

Office: 5th F, Building A1, Zhang-Ge Techno Park, GuanLan Town, ShenZhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report. Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.