

SAMI-P Pendant luminaires



Simple, classic design with excellent craft work. Appearance with rich texture. Extremely saving installation and maintenance time by revolutionary surface mounted structure. Using special anti-glare cover, UGR<18 with comfortable and soft lights for Direct 70% & Indirect 30%. Typical value up to 110lm/W with flicker freely. Support smart functions like Motion sensor, 1-10V and Dali dimming, Tunable white and Emergency function. Work with CASAMBI wireless system to support group setting. Simply assembling structure, flexible to support customers' requirement. Profile aluminum, SDCC, and PC as main materials. Suspension installation with Pole suspension and Steel wire suspension for choosing.

Features

Ultimate quality lighting effects with professional glare control, UGR<18

Perfect details in each part

Extremely simple for installation and maintenance

Direct and Indirect lighting

Support for smart control functions

- DALI dimming
 - 1-10V dimming
 - CASAMBI
-



5 years warranty

Application Areas

For open-plan office, Individual office, Cafeteria, Corridors, Break-out area, Classroom, etc.



Technical data

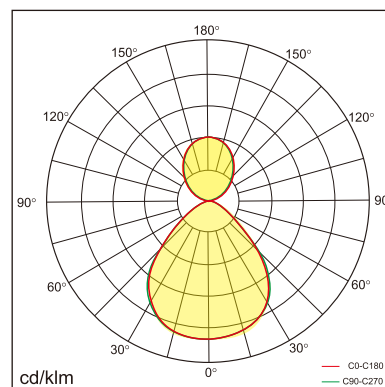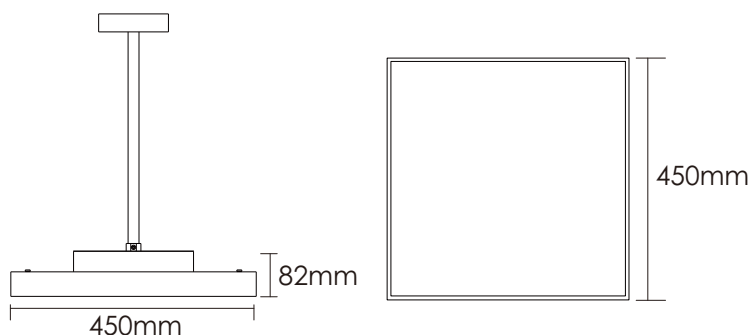

Item No.	BSAP-4503021-NN	BROP-4503021-VN	BROP-4503021-DN
Input Power	↑9W/21W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	↑1000lm/2100lm↓		
UGR	<18		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑100°/95°↓		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10Vdimming	DALIdimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	5.1kg		
Package size	570*570*180mm		
20GP	410PCS		
40GP	905PCS		

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: 3&4th F, Building A3, Xin-Gui-Yuan Industrial Park, DaFu Road, GuanLan Town, ShenZhen, China 518110

Of ce: 5th F, Building A1, Zhang-Ge Techno Park, GuanLan Town, ShenZhen, China 518110



All values in speci cation are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.