

EZY-R recessed luminaire



Simple design, exquisite craftsmanship and rich texture appearance. Two sizes of $\phi 462\text{mm}$ and $\phi 612\text{mm}$ are available; Luminaire housing is made of extruded aluminum, recessed luminaire with frame; suitable for ceiling with 3-40 mm thickness; powder coated surface; Closure by means of a circlip for tool-free installation; luminous efficacy up to 145 lm/W, flicker-free illumination. Provides comfortable, uniform lighting for indoor scenes. Luminaire supports DALI dimming. Profile aluminum and PMMA as main materials.

Features

Simple and exquisite industrial design with rich texture

Come with several size $\phi 462\text{mm}$, $\phi 612\text{mm}$

Extremely simple for installation and maintenance

Light efficiency up to 145lm/W

Support smart control functions

- DALI dimming
 - CASAMBI(Customizable)
-



5 years warranty

Application Areas

Open-plan office, small office, meeting rooms, cafeterias, foyers and lobbies, corridors, staircases, etc.





Technical data

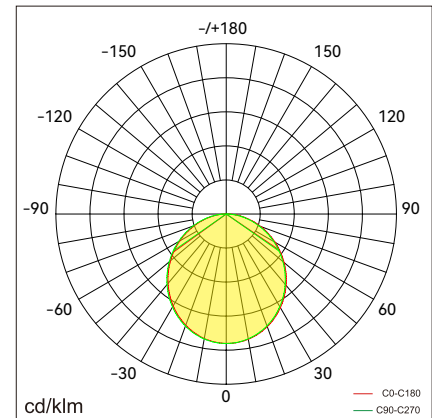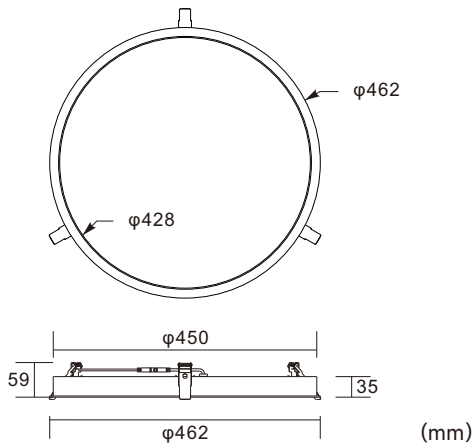



Item No.	BEZR-4501515-NN-01	BEZR-4501515-DN-01	BEZR-4503030-NN	BEZR-4503030-DN
Input Power(±10%)	15W		30W	
Input Voltage	AC200~240V			
Power Factor	≥0.9			
Luminous Flux(±10%)	1950lm ↓		4350lm ↓	
UGR	<20		<25	
Color Rendering Index	>80			
Life Time	L80(B10)50,000H			
Beam Angle	110° ↓			
CCT(±200K)	3000/4000/6000K			
Colour consistency SDCM	<3			
Dimming	NO	Dali dimming	NO	Dali dimming
Sensor	NO			
Housing Color	Silver/White/Black			
Fixture Materia	6063AL			
Protection Level	IP40			
Storage Temperature	-40°C~+80°C			
Working Temperature	-20°C~+45°C			
Net Weight	1.45kg			
Package size	631*129*631mm (1PCS)			

Technical data

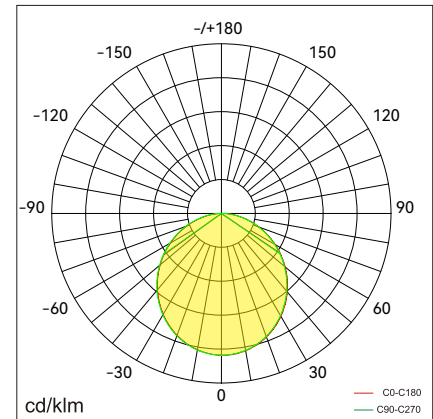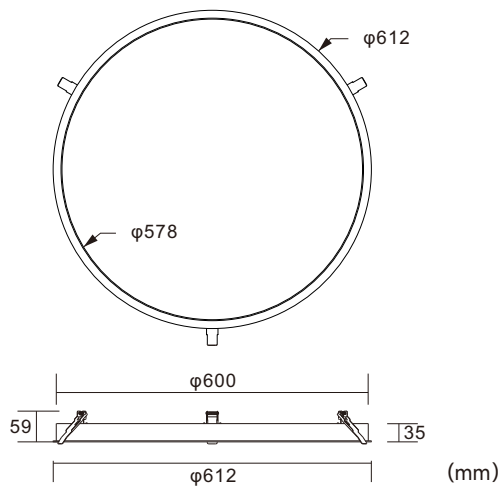

Item No.	BEZR-6002828-NN-01	BEZR-6002828-DN-01	BEZR-6004040-NN	BEZR-6004040-DN
Input Power($\pm 10\%$)	28W		40W	
Input Voltage	AC200~240V			
Power Factor	≥ 0.9			
Luminous Flux($\pm 10\%$)	3920lm		5890lm	
UGR	<20		<25	
Color Rendering Index	>80			
Life Time	L80(B10)50,000H			
Beam Angle	110° ↓			
CCT(± 200 K)	3000/4000/6000K			
Colour consistency SDCM	<3			
Dimming	NO	Dali dimming	NO	Dali dimming
Sensor	NO			
Housing Color	Silver/White/Black			
Fixture Materia	6063AL			
Protection Level	IP40			
Storage Temperature	$-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$			
Working Temperature	$-20^{\circ}\text{C} \sim +45^{\circ}\text{C}$			
Net Weight	2.29kg			
Package size	781*129*781mm (1PCS)			

Packaging

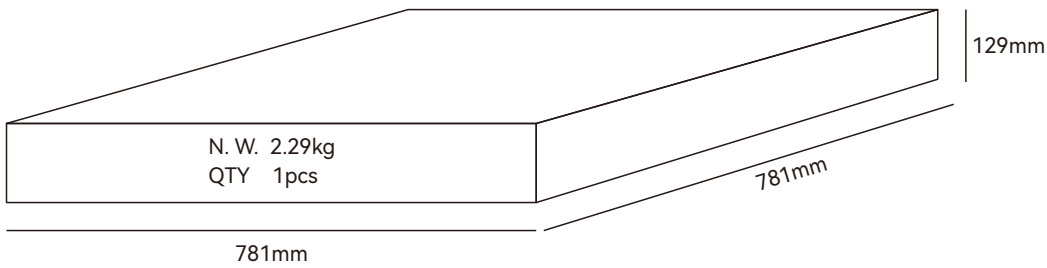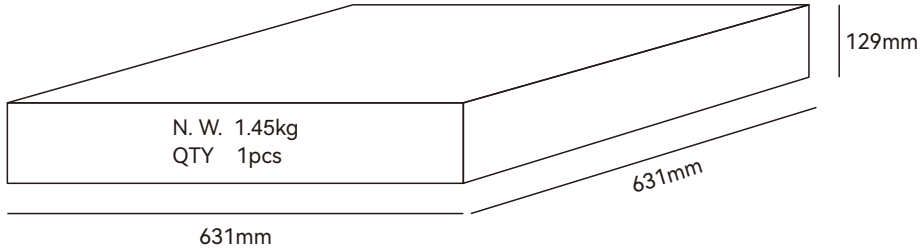

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.
Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.